


ADVANTAGE

- Wattage switchable : 30W/35W/40W (2x2ft) 45W/50W/55W (2x4ft)
- CCT switchable: 3500K/4000K/5000K
- 0-10v dimmable
- PF>0.90 , CRI>80
- Input voltage: AC120-277V
- Lumen : 125LM/W
- Application: corridor, office , school, library, etc



TBL Series





DETAILS

Features

- Slim and modern design.
- Aluminum material frame better heat dissipation.
- High efficiency isolated led driver with dimmable function.
- Wattage and CCT switchable through dip-switches.
- Excellent thermal management system.
- Unique design to save packing space.

Accessories


• Emergency battery ,motion sensor, suspended chains for option.


Certifications

- DLC premium.
- Comply with the requirements of the Standard(s) for Luminaires and are identified with the cETL Listed Mark.

Warranty

- All products from DIMI LIGHT are guaranteed with 5 years' warranty.
- See Warranty policy from Dimi light for additional information.



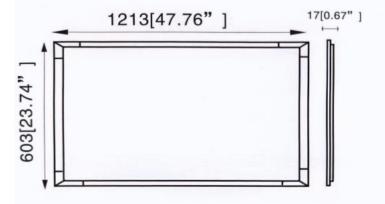

SIZE	Length(inch)	Width (inch)	Height(inch)
2x2ft	23.74″	23.74"	0.67″
2x4ft	47.76″	23.74"	0.67"

Web: www@dimilight.com I Email: mike@dimilight.com I Tel: +86 755 2322 1239 China factory add: D building,XinHui Estate, TangTou the 3rd Industrial park, ShiYan Town,Bao'an District,Shenzhen Us office add:8220 Mayten Ave,Rancho Cucamonga,CA 91730 Tel: 626 519 5222



LED T-BAR LIGHT

SPECIFICATION

MODEL	SIZE	WATT	сст	EFFICACY
DM-TB2240WT-3545K	2x2ft	30W/35W/40W switchable	3500K/4000K/5000K switchable	125Lm/W
DM-TB2455WT-3545K	2x4ft	45W/50W/55W switchable	3500K/4000K/5000K switchable	125Lm/W


ACCESSORY



Suspension Kit

- For suspending the T-bar Light
- Material: stainless steel

INSTALLATIONS

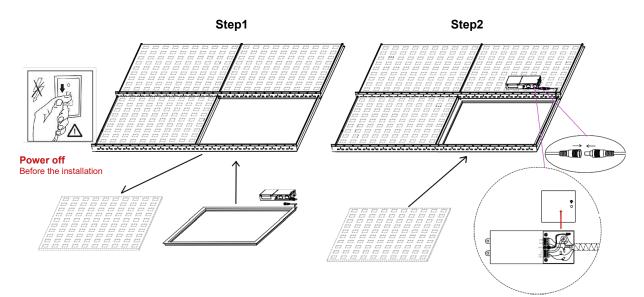

Step 1: Make sure of all the power is off before installing. Remove the one ceiling tile that you need to install light fixture on. Then place the light fixture on the T-bar carefully and make sure it is correctly in place and secure.
Step 2: Place the driver on top of the next ceiling tile. Connect the cable between the driver and the lighting fixture.
Step 3: Open the driver's junction box and connect the AC wire to the driver correctly (L=black & N=white).

PACKING INFO


CI7E	10PCS/CARTON		CONTAINER			
SIZE	DIMENSION(INCH)	N.W(LBS)	G.W(LBS)	20'GP(PCS)	40'GP(PCS)	40HQ(PCS)
2x2ft	25.22"x10.5"x10.23"	13.32	15.65	6020	12470	15,000
2x4ft	43.34"x10.5"x10.23"	20.28	24.91	3500	7250	8800




LED T-BAR LIGHT


PHOTOMETRIC DATA


DM-TB2240W	/T-3545K
Minimum Watt	30W
Maximum Watt	40W
PF	0.982
CRI	84
THD	11.8%
Lumen	5000 Lm
Efficacy (AC)	125 Lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	100-277V





DM-TB2455WT-3545K Minimum Watt 30W Maximum Watt 40W PF 0.982 CRI 84 THD 11.8% Lumen 5000 Lm Efficacy (AC) 125 Lm/W 3500K Minimum CCT Maximum CCT 5000K Voltage Range 100-277V





APPLICATIONS

